



**We Deliver
Trusted Foundation**



View Product

Green Certification



An **IJM** Company

Global reach:

ICP Piles Export Map



Established in 1977, Industrial Concrete Products (ICP Piles) pioneered the commercial manufacturing of High Performance Pretensioned Spun High Strength Concrete Piles (PHC Piles) in Malaysia. With over 45 years of experience, ICP Piles has proudly grown to become one of the largest spun pile manufacturers in Southeast Asia, operating 9 factories nationwide and exporting to Singapore, Brunei, Indonesia, the Philippines, Vietnam, Myanmar, Bangladesh, Sri Lanka, Pakistan, the Maldives, the Middle East, New Zealand, Samoa, the USA, and Canada.

Product Attributes

- 1 High bending strength with prestressed concrete
- 2 High concrete strength for hard strata driving
- 3 Faster production & delivery
- 4 Durable concrete with high corrosion resistance
- 5 Eco-friendly with efficient raw material usage
- 6 Customizable to project needs

Standard

ICP Piles comply with MS 1314: Part 4: 2004 and generally conform to JIS A 5337: 1987. ICP PHC Piles are modified to suit EN 1992-1-1: 2004 - General Rules and Rules for Buildings. The concrete complies with SS EN 206: 2014 - Specification for Concrete.

Material

Aggregates – Coarse and fine aggregates comply with SS EN 206:2014.

Cement – Portland cement complies with SS EN 197:2014.

Prestressing Steel – High frequency induction heat treated bars manufactured to JIS G 3137:1994 and MS 1138:2020.

Spiral Wire – Hard drawn wire complies with BS 4482:2005.

Sizes

ICP Piles' standard single lengths are 6m, 9m and 12m, extendable up to 54m, and prejoined lengths up to 90m, subject to certain limitations. Diameters range from 250mm to 1,200mm. Piles **can be customised** to meet specific project requirements.

Lifting Points

For piles up to 12m, lift using steel hooks at both ends. For piles over 12m, use wire ropes at designated lifting points.

Concrete Strength

Minimum concrete cube strength:


at transfer of prestress	30N/mm ²
at 28 days - C65/80 pile	80N/mm ²
- C75/90 pile	90N/mm ²
- C85/100 pile	100N/mm ²

Delivery

ICP piles can be transported and **driven 3 days after casting** or once cube strength reaches 70N/mm². Standard piles are available ex-stock.

Identification

ICP Piles' standard marking:
Company's Initial
Malaysian Standard
Pile Size and Class
Date of Cast (yyymmdd)
Serial No & Factory Code
Pile Length and Type



Technical Data

Technical data for standard piles are provided in the tables on the next page. Axial loads shown represent ultimate structural capacities; actual working loads depend on soil conditions.

Areas of Application

- >> **Building Foundations**
(Residential, Commercial, High-Rise Developments)
- >> **Industrial & Commercial Facilities**
(Heavy Industries, Warehouse, Data Center)
- >> **Infrastructure Projects**
(Road, Railway, Flyover)
- >> **Renewable Energy**
(Wind Turbine & Solar Farms)
- >> **Marine Structures**
(Port, Jetty, Bridge)
- >> **Piled Embankments**

Project Highlights

Compression Pile
(Class A)

Offshore Marine Center 2

Standard Pile
(Class B)

Garden by the Bay

Marine Pile
(Class C)

International Cruise Terminal



Tampines Industrial Crescent



Neste Oil Factory



Temburong Bridge



The M Condominium



HDB, Sengkang West



Mega Shipyard

ICP Piles Specifications

Class B

Standard Pile

(Effective Prestress ≥ 5 N/mm²)

Ideal for general use and commonly applied in standard piling, delivering good performance under both axial and bending/tension loads across various soil conditions, including moderate ground variability, making it suitable for residential, commercial, and industrial structures.

Nominal Diameter	Nominal Thickness	Single Length	Nominal Weight	Prestressing Bar			Area of Concrete	Section Modulus	Bending Moment		Unfactored Tension	Ultimate Structural Capacity	Effective Prestress	Concrete Grade
				7.1mm	9.0mm	10.7mm			Cracking	Ultimate				
mm	mm	m	kg/m	no.	no.	no.	mm²	x1000 mm³	kNm	kNm	ton	ton	N/mm²	-
250	55	6-12	88	6	-	-	33,694	1,435	18.0	30.1	22	127	6.5	C65/80
									18.3	30.1	22	150	6.4	C75/90
									18.7	30.1	22	173	6.4	C85/100
									27.4	42.6	26	174	5.7	C65/80
300	60	6-12	118	7	-	-	45,239	2,383	28.0	42.6	26	205	5.6	C75/90
									28.5	42.6	26	235	5.6	C85/100
									41.6	63.7	34	238	5.4	C65/80
350	70	6-12	160	9	-	-	61,575	3,778	42.4	63.7	34	280	5.4	C75/90
									43.3	63.7	33	320	5.3	C85/100
									61.6	97.0	45	310	5.5	C65/80
400	80	6-15	209	12	-	-	80,425	5,643	62.8	97.0	45	365	5.5	C75/90
									64.1	97.0	45	418	5.5	C85/100
									78.4	117.9	48	362	5.1	C65/80
450	80	6-15	242	-	8	-	92,991	7,624	80.0	117.9	48	426	5.1	C75/90
									81.6	117.9	48	483	5.1	C85/100
									106.1	163.4	61	451	5.1	C65/80
500	90	6-15	301	-	10	-	115,925	10,518	108.2	163.4	60	530	5.1	C75/90
									110.3	163.4	60	603	5.1	C85/100
									172.4	276.1	85	609	5.3	C65/80
									175.5	276.1	85	716	5.3	C75/90
600	100	6-18	408	-	14	-	157,080	17,546	178.7	276.1	85	817	5.3	C85/100
									281.2	461.9	122	779	5.9	C65/80
									286.1	461.9	121	918	5.8	C75/90
									290.9	461.9	121	1,057	5.8	C85/100
700	110	6-18	530	-	20	-	203,889	27,131	399.3	635.4	147	986	5.6	C65/80
									406.4	635.4	146	1,160	5.6	C75/90
									413.6	635.4	146	1,333	5.6	C85/100
									542.0	835.9	172	1,217	5.4	C65/80
900	130	6-18	818	-	28	-	314,473	54,942	552.0	835.9	171	1,431	5.3	C75/90
									562.0	835.9	171	1,635	5.3	C85/100
									732.2	1,122.6	208	1,463	5.4	C65/80
									745.8	1,122.6	207	1,721	5.4	C75/90
1000	140	6-18	983	-	-	24	378,248	74,056	759.3	1,122.6	206	1,966	5.4	C85/100
									1,282.4	2,035.0	311	1,874	6.2	C65/80
									1,304.2	2,035.0	310	2,212	6.2	C75/90
1200	150	6-18	1286	-	-	36	494,801	120,188	1,326.0	2,035.0	309	2,549	6.1	C85/100

Formula for Ultimate Structural Capacity

Based on EN 1992-1-1, the ultimate structural capacity as below:

$$N_{Ult} = \text{Min}\{0.60f_{ck} ; (f_{cd} - f_{pe})\} \times A_c$$

- Where, N_{Ult} = Ultimate Structural Capacity
 f_{cd} = Design Compressive Strength of Concrete, $f_{cd} = k_t \cdot \alpha_{cc} \cdot f_{ck} / \gamma_c$
 f_{pe} = Effective Prestress after Losses
 f_{ck} = Characteristic Compressive Concrete Cylinder Strength
 A_c = Cross-Section Area of Concrete
 γ_c = Partial Safety Factor for Concrete
 k_t = Factor of concrete strength at age > 28 days
 α_{cc} = Coefficient taking account of long-term effects on compressive strength

Class A

Compression Pile

(Effective Prestress ≥ 4 N/mm²)

Primarily designed for high axial compression load-only applications, offering a cost-effective foundation solution recommended for stable ground conditions.

Nominal Diameter	Nominal Thickness	Single Length	Nominal Weight	Prestressing Bar		Area of Concrete	Section Modulus	Bending Moment		Ultimate Structural Capacity	Effective Prestress	Concrete Grade
				7.1mm	9.0mm			Cracking	Ultimate			
mm	mm	m	kg/m	no.	no.	mm²	x1000 mm³	kNm	kNm	ton	N/mm²	-
350	80	6-12	176	9	-	67,858	3,950	41.6	62.7	266	4.9	C65/80
						67,858	3,950	42.5	62.7	311	4.9	C75/90
						67,858	3950	43.4	62.7	353	4.9	C85/100
400	90	6-15	228	12	-	87,650	5,872	61.6	95.6	342	5.5	C65/80
	100		245			94,248	6,044	61.4	94.3	371	4.8	C65/80
	90		228			87,650	5,872	62.9	95.6	401	5.5	C75/90
	100		245			94,248	6,044	62.7	94.3	432	4.7	C75/90
	90		228			87,650	5,872	64.2	95.6	456	5.5	C85/100
450	100	6-15	245	-	8	94,248	6,044	64.0	94.3	490	4.7	C85/100
	90		265			101,788	7,996	78.9	116.5	401	4.7	C65/80
	100		286			109,956	8,292	79.0	115.1	437	4.4	C65/80
	105		296			113,804	8,414	79.0	114.4	452	4.2	C65/80
	90		265			101,788	7,996	80.5	116.5	467	4.7	C75/90
	100		286			109,956	8,292	80.8	115.1	504	4.3	C75/90
	105		296			113,804	8,414	80.8	114.4	522	4.2	C75/90
	90		265			101,788	7,996	82.2	116.5	529	4.6	C85/100
	100		286			109,956	8,292	82.6	115.1	572	4.3	C85/100
	105		296			113,804	8,414	82.6	114.4	592	4.2	C85/100
500	100	6-15	327	-	10	125,664	10,972	105.6	161.6	494	4.8	C65/80
	110		350			134,774	11,341	106.7	159.9	534	4.5	C65/80
	115		362			139,094	11,497	106.6	159.0	553	4.3	C65/80
	100		327			125,664	10,972	108.8	161.6	576	4.7	C75/90
	110		350			134,774	11,341	109.0	159.9	618	4.4	C75/90
	115		362			139,094	11,497	109.0	159.0	638	4.3	C75/90
	100		327			125,664	10,972	111.0	161.6	653	4.7	C85/100
	110		350			134,774	11,341	111.3	159.9	701	4.4	C85/100
	115		362			139,094	11,497	111.3	159.0	723	4.3	C85/100
	110		440			169,332	18,302	173.1	273.6	662	5.0	C65/80
600	120	6-18	470	-	14	180,956	18,945	173.5	271.1	713	4.7	C65/80
	125		485			186,532	19,228	173.5	269.8	738	4.5	C65/80
	110		440			169,332	18,302	176.5	273.6	777	4.9	C75/90
	120		470			180,956	18,945	177.0	271.1	830	4.6	C75/90
	125		485			186,532	19,228	177.06	269.8	856	4.5	C75/90
	110		440			169,332	18,302	179.8	273.6	880	4.9	C85/100
	120		470			180,956	18,945	180.4	271.1	941	4.6	C85/100
	125		485			186,532	19,228	180.58	269.8	970	4.5	C85/100

Class C

Marine Pile


(Effective Prestress ≥ 7 N/mm²)

Engineered for high bending and tension capacity, and can be customized up to 10 N/mm², making it ideal for structures subjected to high bending moments and lateral forces, such as bridges, ports, viaducts, jetties, and offshore foundations.


Nominal Diameter

ICP Piles Sectional Details


Pile with Shoe

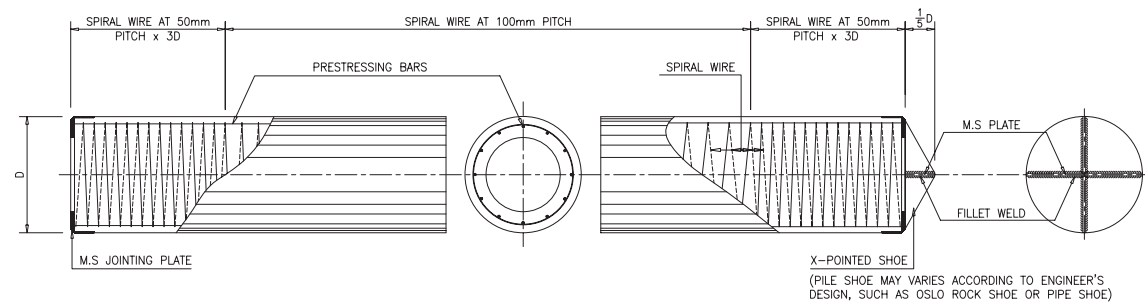

Extension Pile

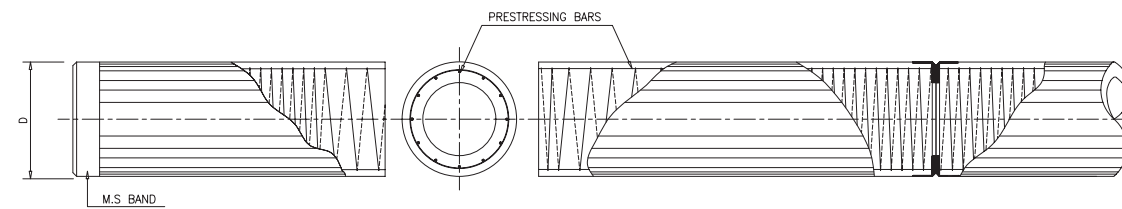


Type of Shoes

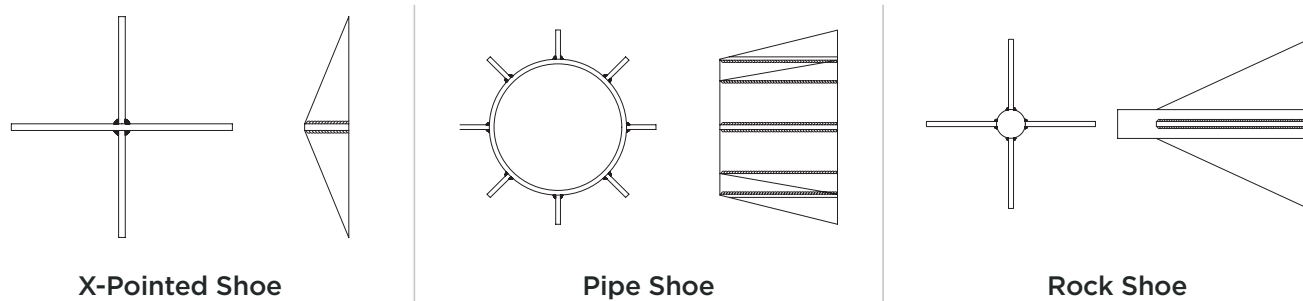

ICP Piles can be driven open ended without shoe.

Bonding ICP Piles into Pile Cap

(Optimized 2-3 x Diameter Pile Spacing per Industry/Engineering Practices)

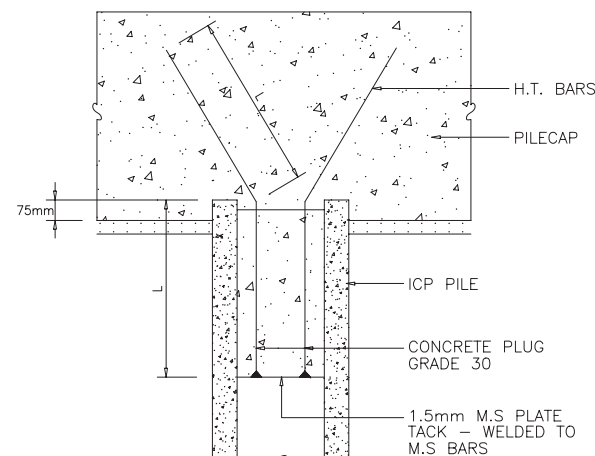

Diameter of Pile	H.T. Bars		
	Quantity	Dia.	L
mm	nos	mm	mm
250	4	12	500
300	4	12	500
350	5	12	550
400	5	12	700
450	5	16	800
500	6	16	900
600	8	16	1,000

As the PC bars are bonded with concrete, ICP Piles may be cut off at any point. The piles need not be stripped down to expose the bars and can be bonded to the pile cap as shown in the above sketch. If the piles are not subjected to tensile loads, the recommended H.T. bars are considered adequate.

Trusted Foundation Certified Green



MS 1314 : PART 4 : 2004

SS EN 206



Corporate
Video



Manufacturing
Video



ICP PILES

Industrial Concrete Products Sdn Bhd

✉ icpsales@ijm.com

🌐 www.icpb.com.my



Headquarters

Wisma IJM Annexe,
Jalan Yong Shook Lin,
46050 Petaling Jaya, Selangor Darul Ehsan,
Malaysia.



Southern Office

CT 5435, 5633 & CT 5445,
Lot 5643, Jalan Seelong, Mukim Senai-Kulai,
81400 Senai, Johor.



Northern Office

Unit 1-13-01, Menara IJM Land, No, 1 Lebuhr Tunku
Kudin 3, 11700 Gelugor, Penang.



Eastern Office

Lot PT8022 (Lot 110338),
Kawasan Perindustrian Gebeng, Jalan Gebeng
By Pass, 26100 Kuantan, Pahang.



ICP Piles Factories

Senai • Ulu Choh • Nilai • Klang • Kapar •
Bestari Jaya • Kuantan • Lumut • Jawi



October 2025